

#10	#7	#5	#4	#3	
<b>STRIP BACKING SIZES BEFORE FORMING</b>					
1 1/4" x .050	7/8" x .035	5/8" x .037	1/2" x .030	.425 x .025	
<b>STRIP BACKING SIZES AFTER FORMING</b>					
APPROXIMATE WIDTH	7/16" (.437)	5/16" (.312)	7/32" (.218)	3/16" (.187)	5/32" (.156)
APPROXIMATE HEIGHT	1/2" (.500)	5/16" (.312)	1/4" (.25)	7/32" (.218)	5/32" (.156)
MINIMUM O/A HEIGHT*	3/4"	1/2"	7/16"	3/8"	3/8"
MAXIMUM O/A HEIGHT*	14"	12"	10"	8"	6"
FILAMENT SIZE RANGE	.003-.072	.003-.050	.003-.040	.003-.032	.003-.024


\*Depends upon filament size

Metal Backing Material: Electro-Galvanized steel or stainless steel

Fill Materials: Synthetics: Nylon 6, 6.6, 6.12; Polypropylene; Polystyrene.

Or Tampico; Horeshair; Wire

Other Fills Are Available Upon Request.

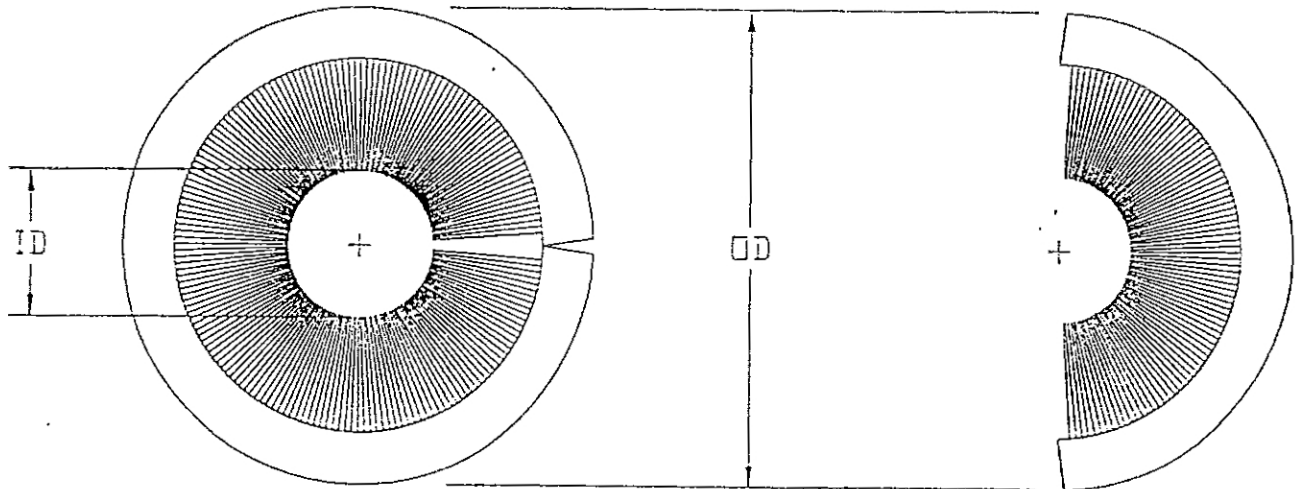

Minimum Inverted Disc/Coil O.D.'s

#10 = 8"    #7 = 6"    #5 = 4"    #4 = 2"    #3 = 1-1/4"